

250W Medical / ITE External Power Supplies

Features

- ◆ Meets DoE Level VI & EU Tier 2 Efficiency
- ◆ Medical & ITE Certifications
- ◆ < 0.15W Off-load Power Draw
- ◆ Meets IEC60601-1-2 Ed4
- ◆ Suitable for B & BF Rated Equipment



Key Market Segments & Applications



Specifications		
	Model	DTM250-D
Input Voltage range	VAC	90 - 264VAC (47 - 63Hz)
Inrush Current	A	<80A at 230VAC input, 25°C ambient cold start
Input Current	A	2.5A @115VAC; 1.3A @230VAC Maximum
Touch Current	-	<100uA @ 264VAC
Power Factor	-	Meets EN61000-3-2, >0.9 at 230VAC full load
Hold Up Time (Typ)	ms	10ms at 115VAC input
Temperature Coefficient	%/°C	±0.05%/°C
Adjustment Range	-	None
Minimum Load	A	None
Total Regulation	%	±5%
Ripple & Noise (pk-pk)	mV	12V: 240mV, 19 - 54V: 300mV
Overload & Short Circuit Protection	-	105 - 160% - hiccup mode
Overvoltage Protection	V	Cycle input power to reset
Efficiency	%	>89%, average efficiency
Operating Temperature	°C	-20 to +60°C derate linearly to 50% load from 40 to 60°C Derate linearly to 80% load from 0 to -20°C
Storage Temperature	°C	-20 to +85°C
Humidity (non condensing)	%RH	0 - 95%RH
Cooling	-	Convection
Withstand Voltage	VAC	Input to Output 4kVAC (2xMoPP), Input and Output to Ground 1.5kVAC (1xMoPP)
Safety Agency Certification	-	IEC/ES/CSA/EN60601-1, IEC/UL/CSA/EN60950-1, CE Mark
Offload Power Consumption	W	< 0.15W
EMC	-	IEC60601-1-2 Ed4:2014, EN55011 Class B, EN55032 Class B, FCC Part 15 Class B, FCC Part 18 Class B
Altitude	m	5,000m maximum
Weight (Typ)	g	1300g
Size (WxLxH)	in (mm)	3.543 x 7.874 x 1.77" (90 x 200 x 45mm)
Cable Length	mm	800mm
AC Input Connector	-	IEC 320-C14 (3 prong)
Output Mating Connector	-	Molex Mini Fit 39-28-1063 or equivalent; Pins 1 - 3: -Vout, Pins 4 - 6: +Vout
Warranty	Years	Three Years


Notes:

Other connectors are available. Contact factory.

Model Selector

Model	Output (V)	Maximum Output (A)	Maximum Power (W)
DTM250PW120D	12V	20.83A	250W
DTM250PW190D	19V	13.157A	250W
DTM250PW240D	24V	10.416A	250W
DTM250PW280D	28V	8.928A	250W
DTM250PW360D	36V	6.94A	250W
DTM250PW480D	48V	5.208A	250W
DTM250PW540D	54V	4.629A	250W

Outline Drawing

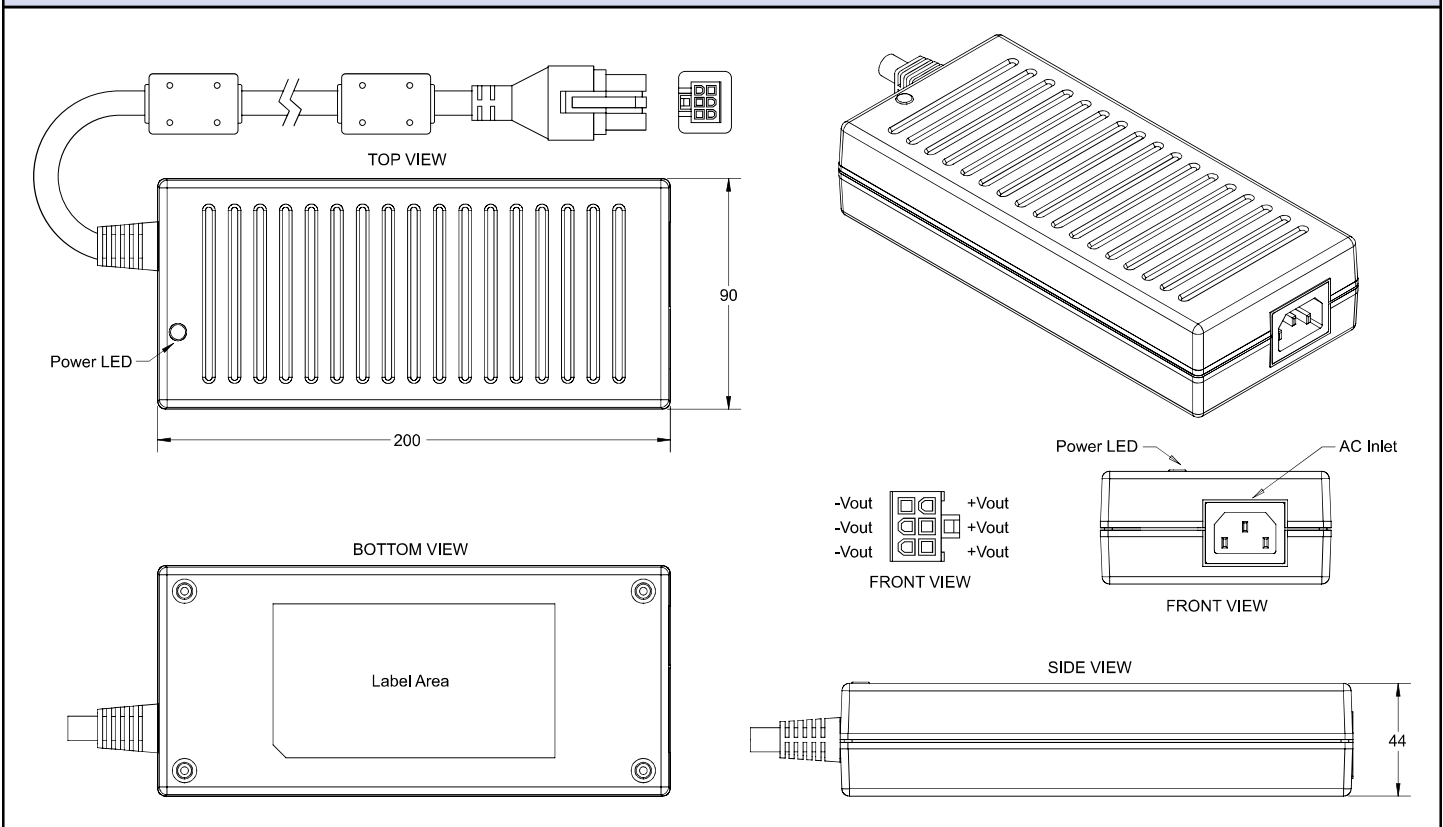

For Additional Information, please visit us.tdk-lambda.com/lp/products/dt-c-series.htm



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK-Lambda:](#)

[DTM250PW120D](#) [DTM250PW240D](#) [DTM250PW480D](#) [DTM250PW540D](#) [DTM250PW190D](#) [DTM250PW360D](#)
[DTM250PW280D](#)