

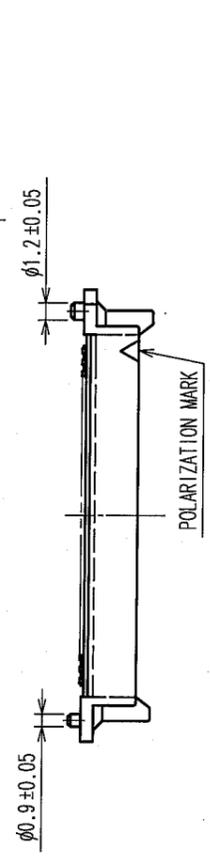
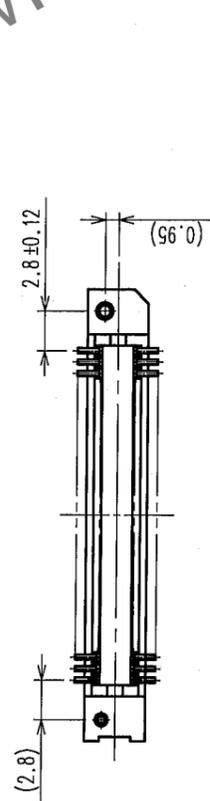
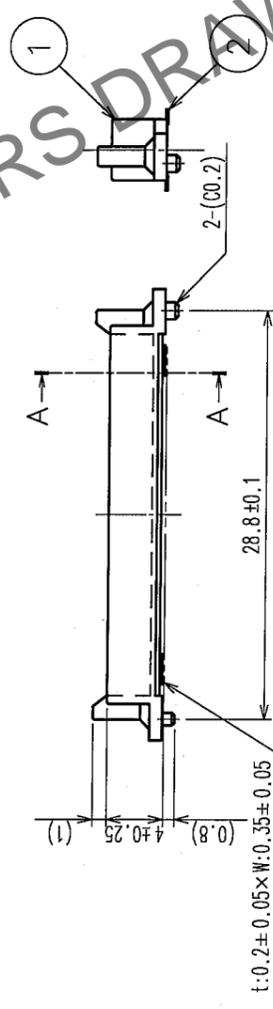


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

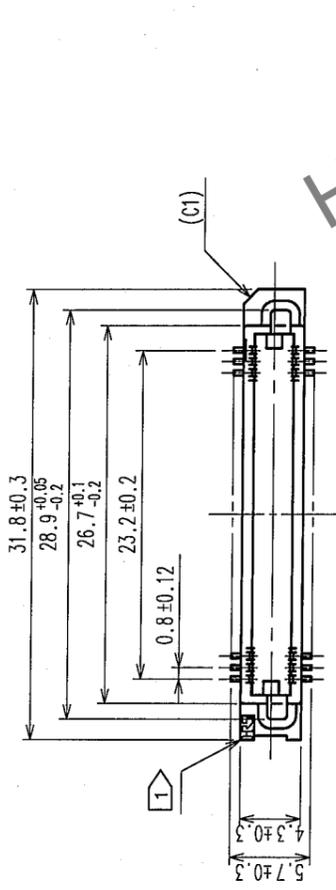


A-A (10:1)

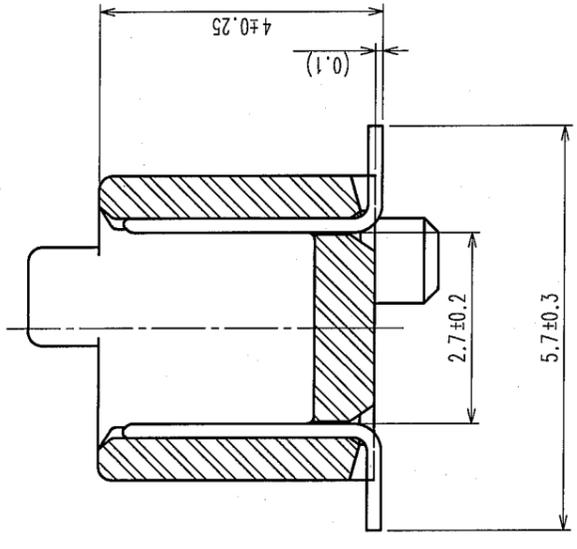

- NOTE
- 1 HRS MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
 - 4 SEE NEXT PAGE FOR DETAILS.
 - 5 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
 - 6 SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC. FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 - 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.


HRS DRAWING FOR REFERENCE

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)


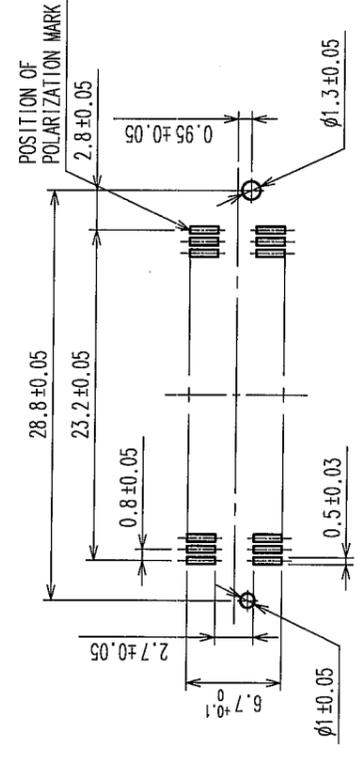


1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA: GOLD FLASH UNDER PLATING: NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN		DESIGNED	CHECKED
		K. NAKAMURA		K. NAKAMURA	(Ogawa)
		06.01.24		06.01.24	06.01.25
DRAWING NO.		PART NO.		APPROVED	
EDC3-084968-23		FX6-60P-0.8SV(93)		H. Okawa	
SCALE		CODE NO.		RELEASED	
2:1		CL576-0005-4-93		06.01.25	
UNITS		HIROSE ELECTRIC CO., LTD			
ITTT					



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

UNREELING DIRECTION


REEL DIMENSION (FREE)

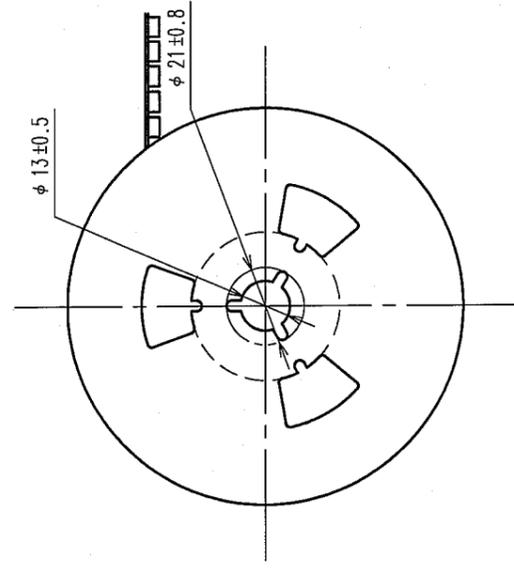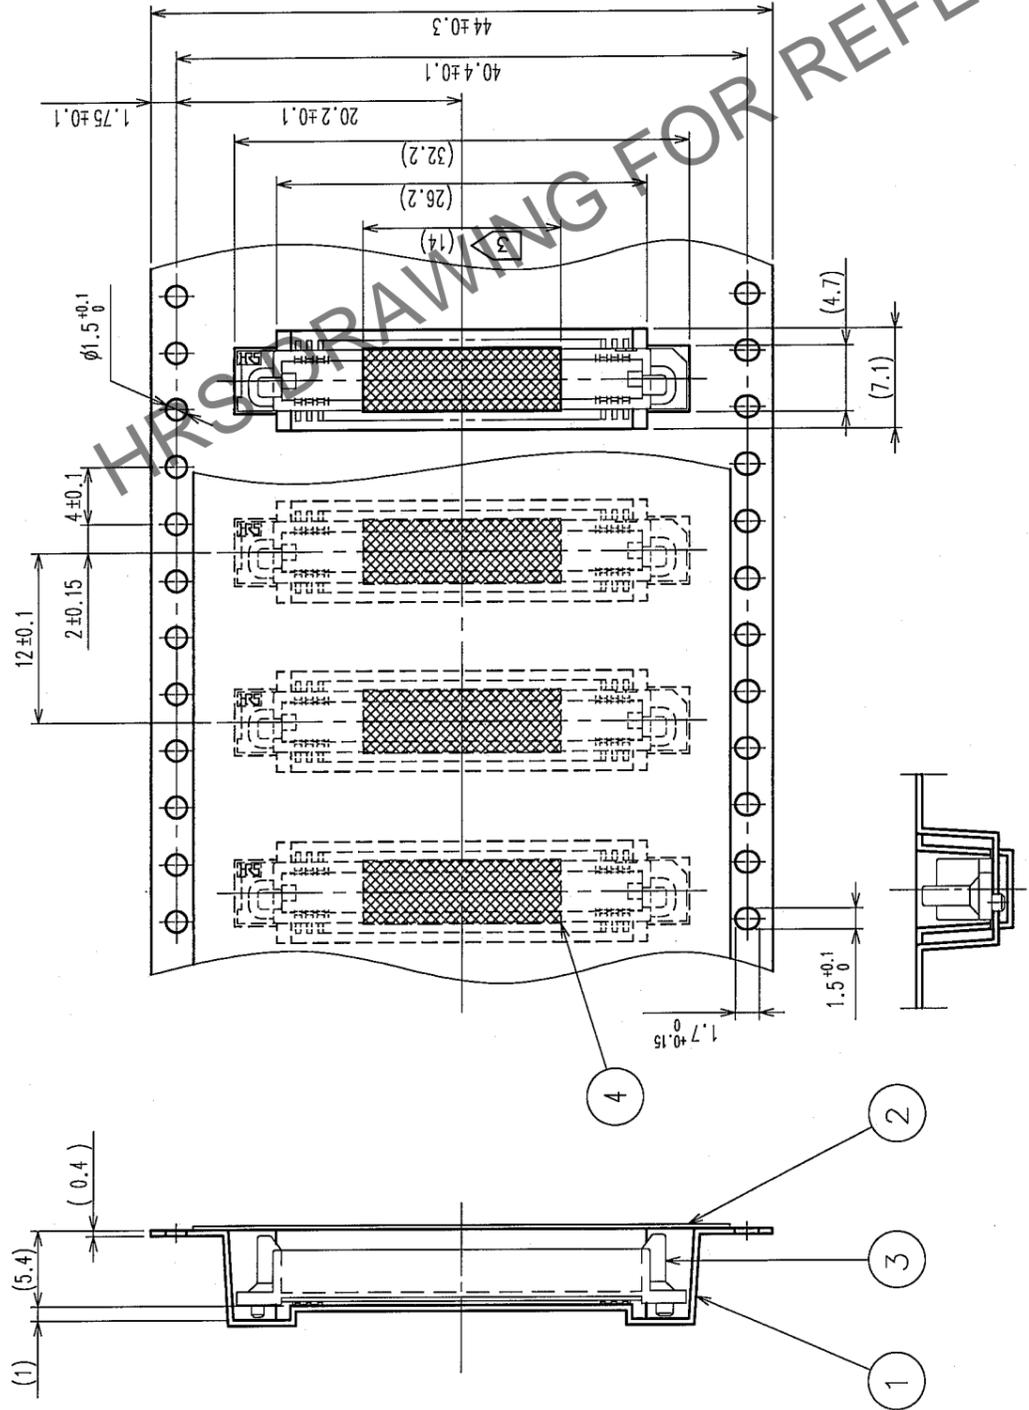

DETAIL OF TAPE FOR VACUUM PICKUP(5:1)

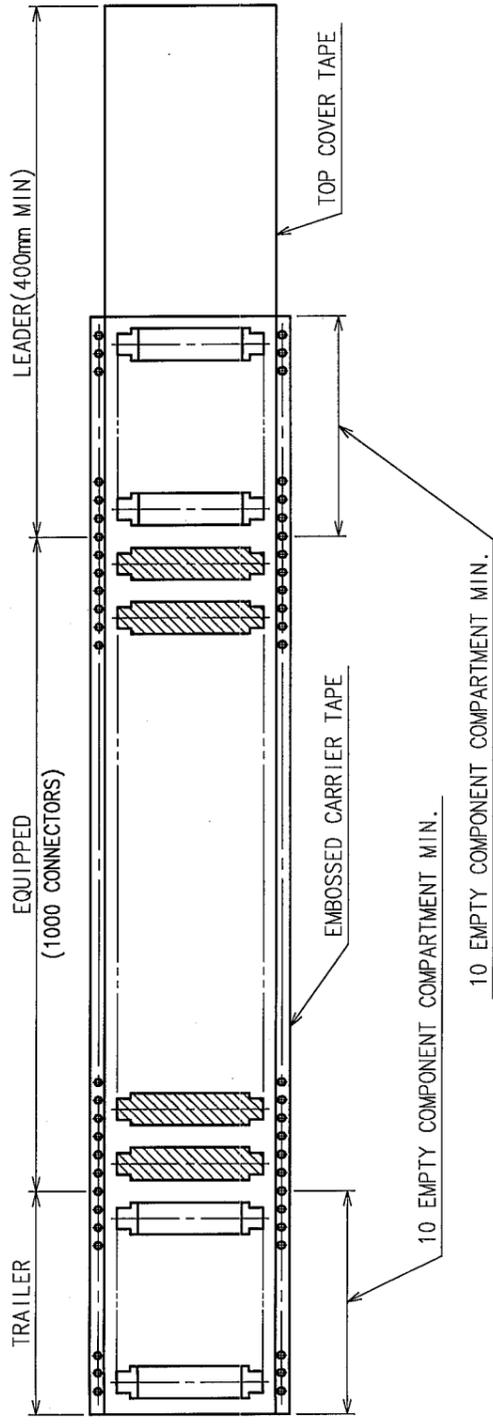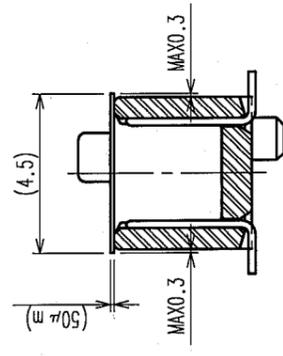

NOTE 1 1 REEL : 1000 CONNECTORS.
 2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 3 REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

2	POLYESTER	(TOP COVER TAPE)	4	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
1	POLYSTYRENE	(EMBOSSED CARRIER TAPE)	3		(CONNECTOR)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	K. NAKAMURA	K. NAKAMURA	K. Ogawa	H. Okawa	
	06.01.24	06.01.24	06.01.25	06.01.25	

DRAWING NO.	EDC3-084968-23	PART NO.	FX6-60P-0.8SV(93)
SCALE	2 : 1	CODE NO.	CL576-0005-4-93
UNITS	ITM		

TO	