

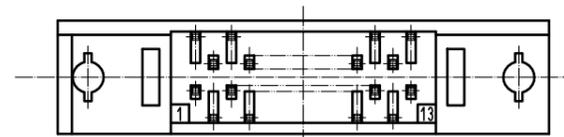
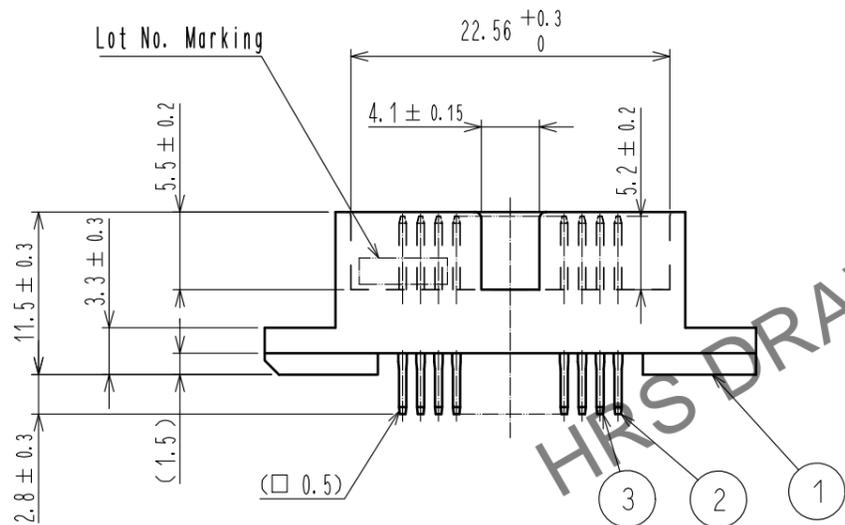
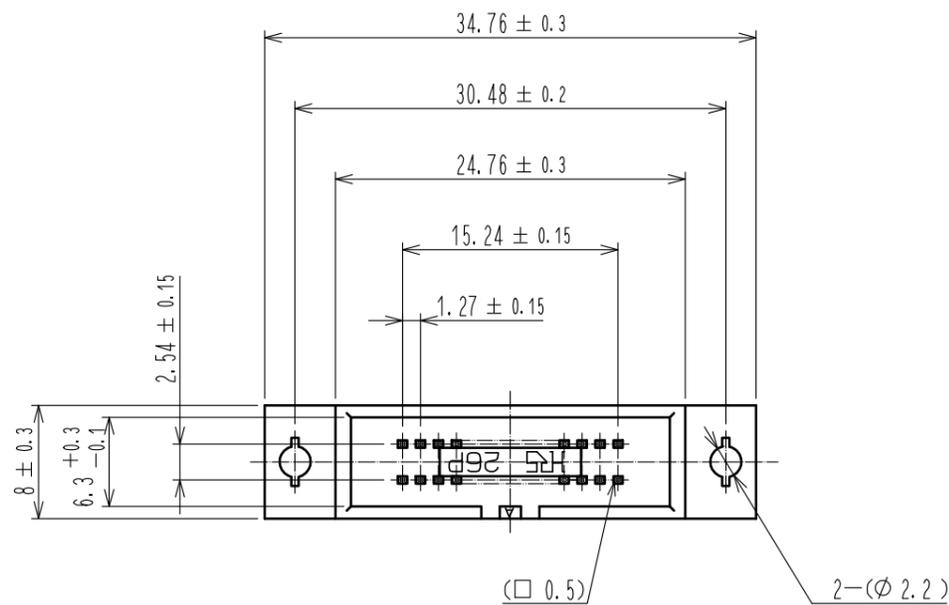


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

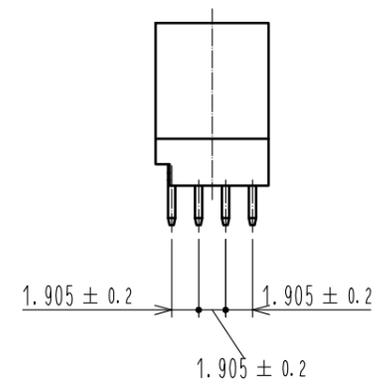

△ Recommended PC board hole pattern (mounting side)

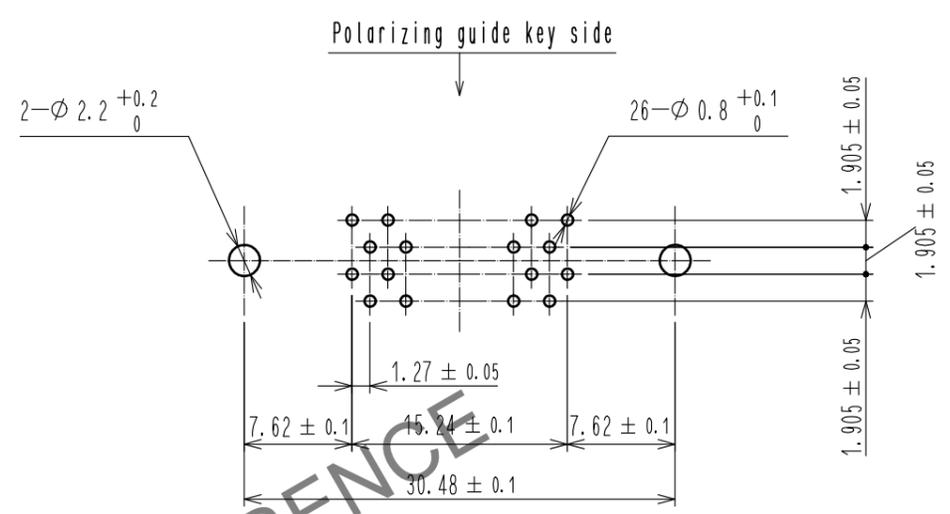

Notes 1 The dimensions in parentheses are for reference.

2	BRASS	Contact area : Gold 0.2µm min. Dip area : TIN-Plating 2µm min. Under plating : Nickel 2.5µm min.	3	BRASS	Contact area : Gold 0.2µm min. Dip area : TIN-Plating 2µm min. Under plating : Nickel 2.5µm min.				
1	PBT	BLACK UL94V-0							
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS				
UNITS	mm	SCALE	2 : 1	COUNT	1	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
						DIS-F-00003693	TM. NAKAJIMA	HT. YAMAGUCHI	18.09.11
APPROVED : HT. YAMAGUCHI		18.06.25		DRAWING NO.		EDC-019074-71-21			
CHECKED : HT. YAMAGUCHI		18.06.25		PART NO.		HIF6B-26PA-1.27DSA(71)			
DESIGNED : TY. EDAGAWA		18.06.25		CODE NO.		CL631-0352-5-71			
DRAWN : MK. OOKI		18.06.21				△ 1/1			