


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

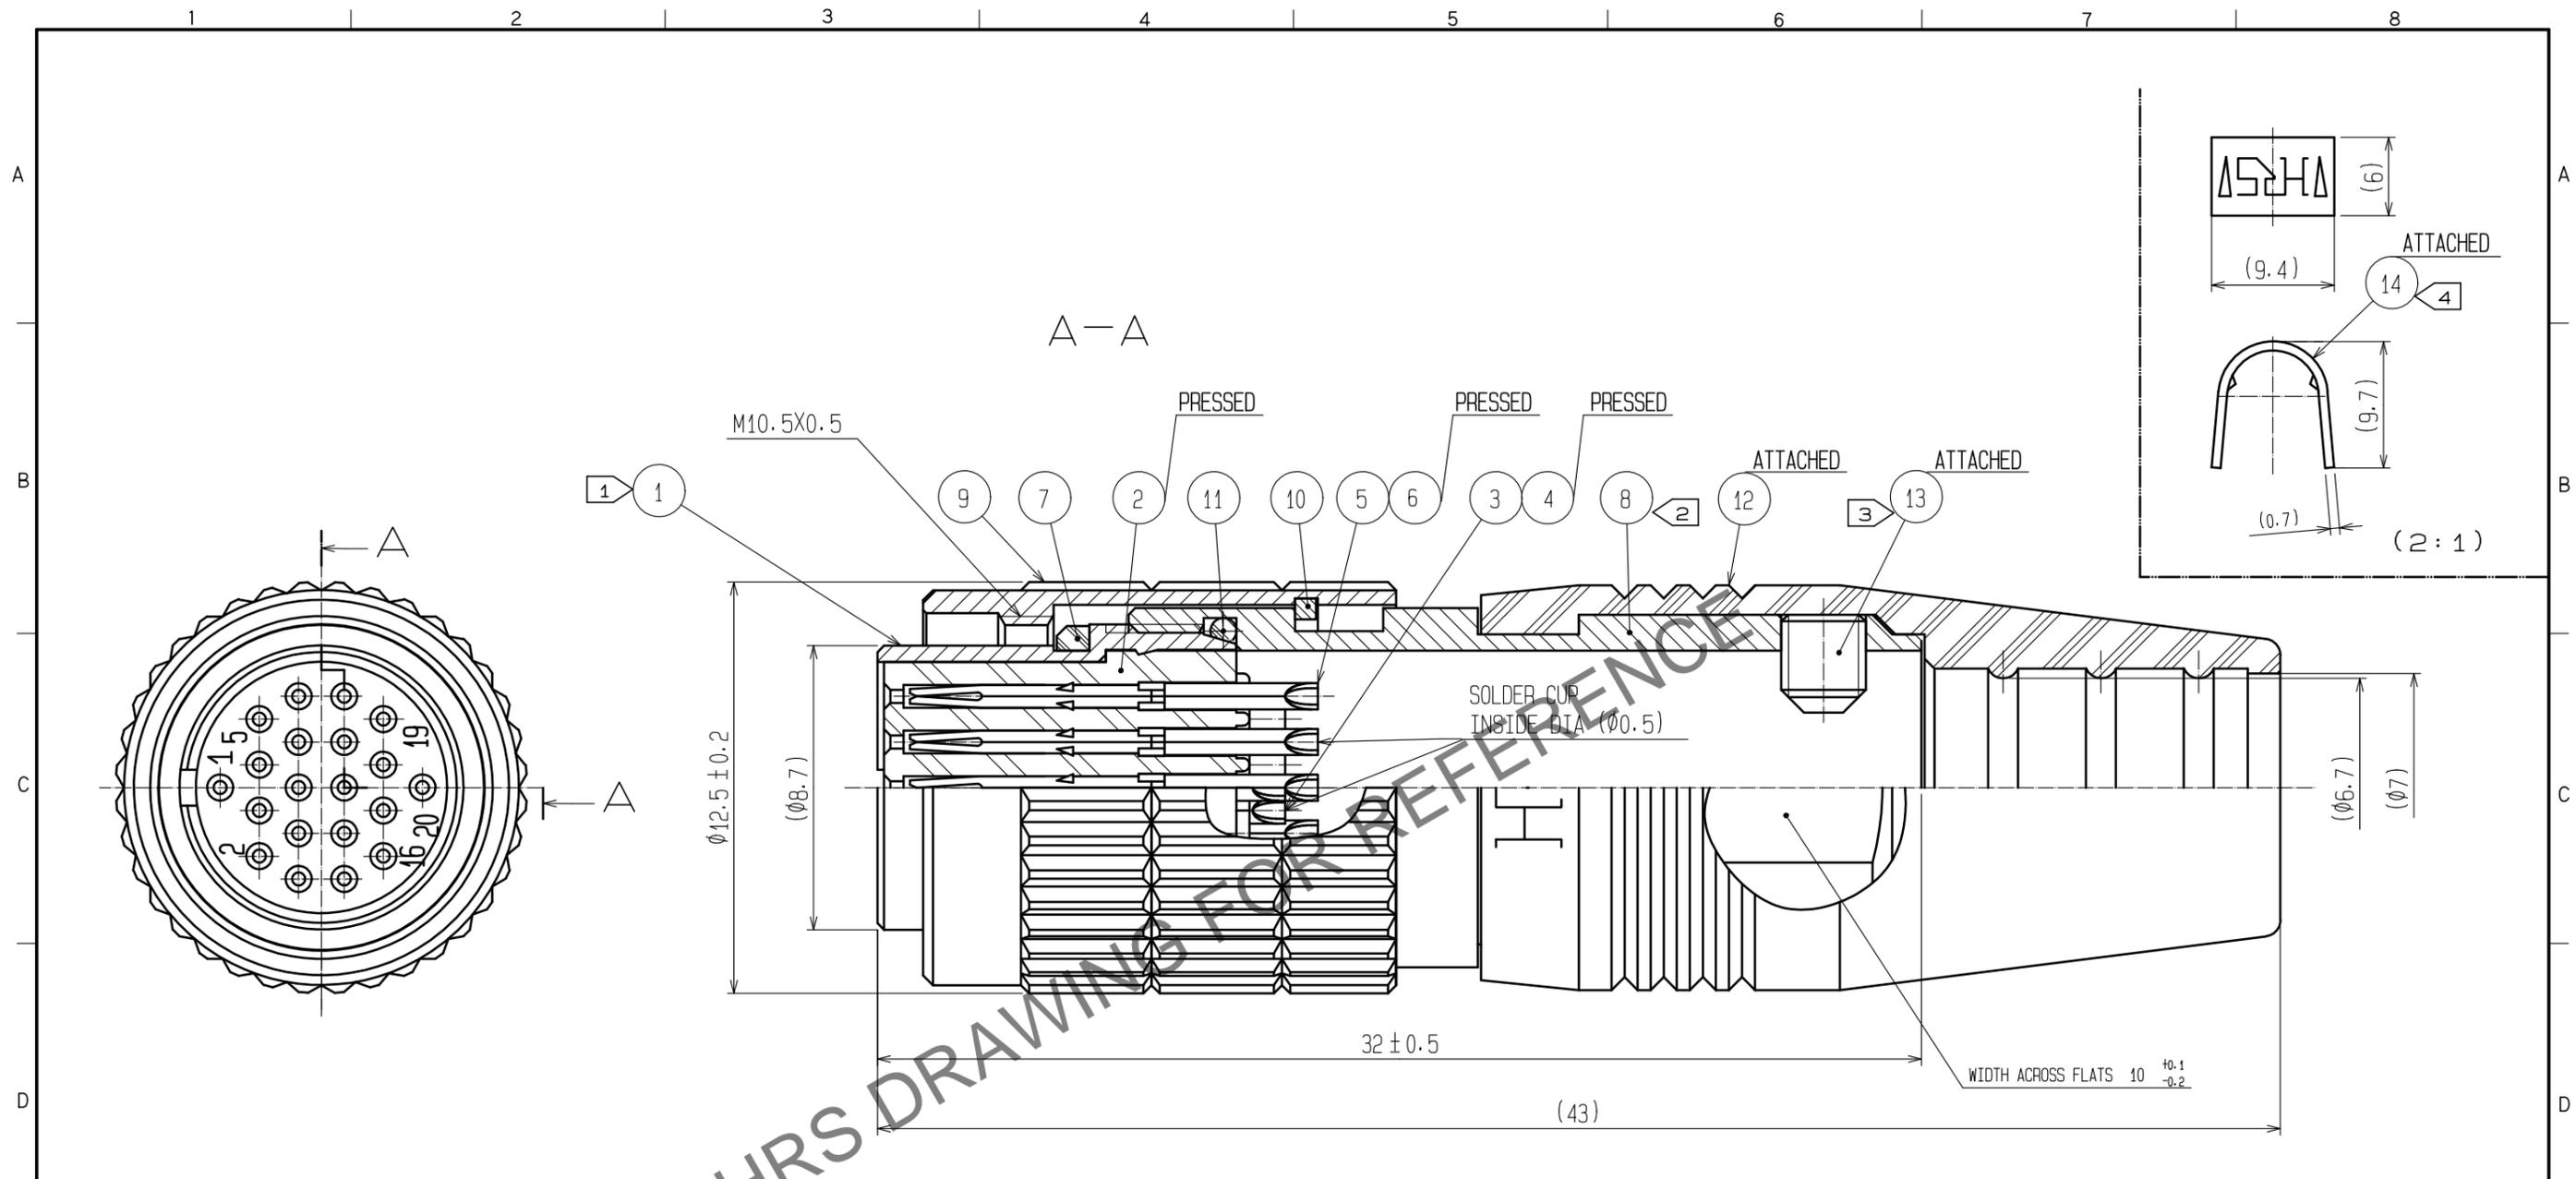

- NOTES
- ① THREAD PORTION OF REF.NO. ① IS APPLIED WITH PRECOATING TO PREVENT LOOSENESS. HOWEVER, THE ADHESIVE EFFECTIVENESS IS DECREASED WHEN REUSED.
 - ⚠ THEREFORE, TREAD PORTION APPLIES TO COAT WITH LOCTITE 263 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT.
 - ② THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ⑧ TO BE 1 N·m.
 - ③ THE TIP OF REF.NO. ⑬ SHALL BE FIXED TO THE CONCAVE PORTION WITH REF.NO. ⑭ CLAMPED TO THE CABLE. OPPOSITE SIDE DIMENSION OF A HEXAGON SOCKET OF REF.NO. ⑬ IS 1.27mm. AND THE RECOMMENDED TIGHTENING TORQUE OF REF.NO. ⑬ TO BE 0.3 TO 0.4 N·m.
 - ④ MANUAL CRIMPING TOOL OF REF.NO. ⑭ : HR10A-TC-02(THE HOLE DIAMETER FOR CRIMPING : $\phi 7$)
 - 5 ROTATION EXAMPLES OF REF.NO. ① AND ⑧ ARE SHOWN.
 - ⑥ OVER PLATING : GOLD 0.2 μ m min.
TERMINAL AREA : GOLD FLASH
UNDER PLATING : NICKEL 2 μ m min.
 - ⚠ 7 THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0361-00.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
8	BRASS	NICKEL PLATING	14	BRASS	
7	EPDM	(BLACK)	13	STEEL	NICKEL PLATING M2.6X0.45X3
5, 6	PHOSPHOR BRONZE	⑥	12	EPDM	(BLACK)
3, 4	PHOSPHOR BRONZE	⑥	11	EPDM	(BLACK)
2	PPS	(BLACK) UL94V-0	10	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	9	BRASS	NICKEL PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	2	DIS-C-00016972	HT. ZENBA	EJ. KUNII	20240229

APPROVED	: MR. YOSHIDA	20050105	DRAWING NO.	EDC3-047207-73
CHECKED	: MO. SATOH	20050105	PART NO.	HR25-9TP-20S(73)
DESIGNED	: YH. YAMADA	20050105	CODE NO.	CL0125-0106-6-73
DRAWN	: YH. YAMADA	20050105		