


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

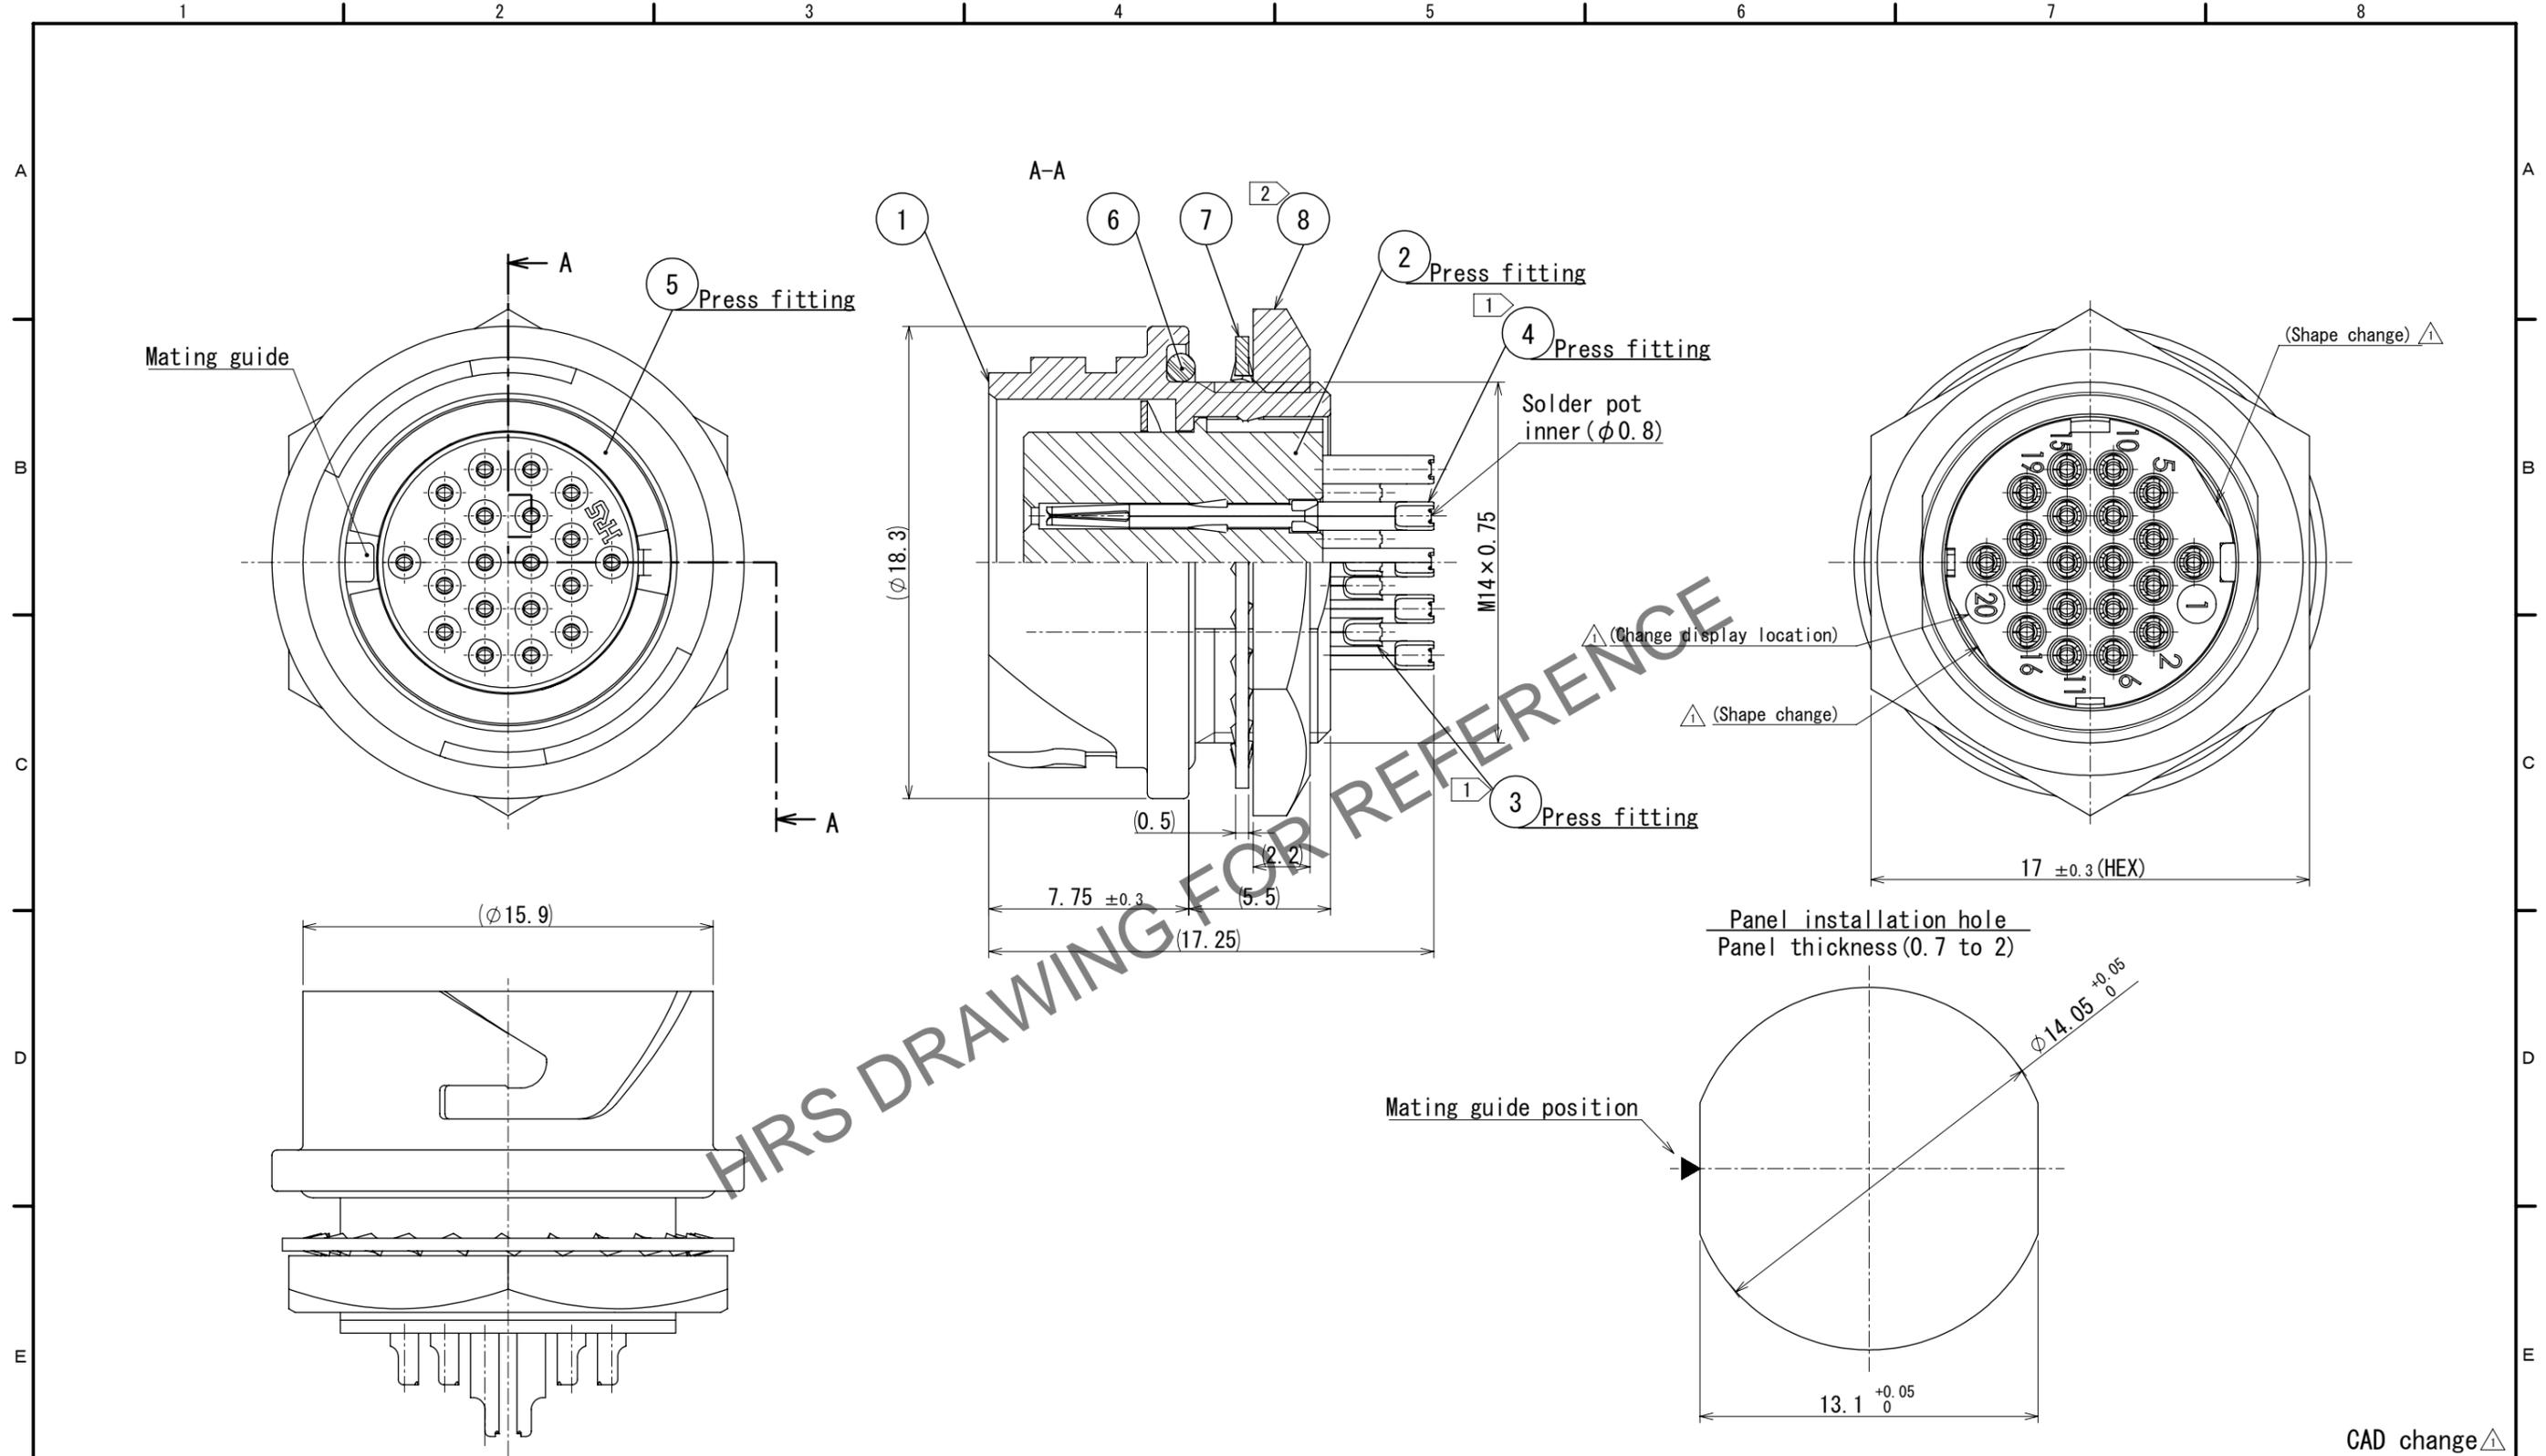

- Notes
- ① Plating (Ref. No. ③, ④)  
 Contact area : Gold 0.2 μm min.  
 Others : Gold and Nickel  
 Under plating: Nickel 2 μm min.
  - ② The recommended clamp torque of Ref.No. ⑧ to be 2 to 2.5 N·m.
  - △ Thread locker to the threaded portion of Ref.No. ① apply to prevent Ref.No. ⑧ from loosening.  
 Recommended thread locker : Loctite 263, Henkel Japan Ltd.
  - 3 When this connector is mounted on to panel, be careful Ref.No. ⑥ is assembled surely into the groove of Ref.No. ⑥ as shown in this figure to keep waterproof effectiveness.

4	Phosphor bronze	①	8	Brass	Nickel plating		
3	Phosphor bronze	①	7	Phosphor bronze	Nickel plating		
2	Polyphenylene sulfide	(Black) UL94V-0	6	Chloroprene rubber	(Black)		
1	Zinc alloy	Nickel plating	5	Phosphor bronze	Nickel plating		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
UNITS mm		SCALE 4:1		COUNT 5		DESCRIPTION OF REVISIONS DIS-C-00021469	
DESIGNED Y.J. KOGA		CHECKED HY. KOBAYASHI		DATE 2026.02.18		DRAWING NO. EDC-114399-00-00	
PART NO. LF13WBR-20S		CODE NO. CL0136-1010-8-00		DRAWING NO. EDC-114399-00-00		PART NO. LF13WBR-20S	
DRAWN YH. YAMADA		DESIGNED YH. YAMADA		CHECKED MO. SATOH		APPROVED MR. YOSHIDA	
2005.01.05		2005.01.05		2005.01.05		2005.01.05	

CAD change △